


(PRIOR ART)

Figure 1

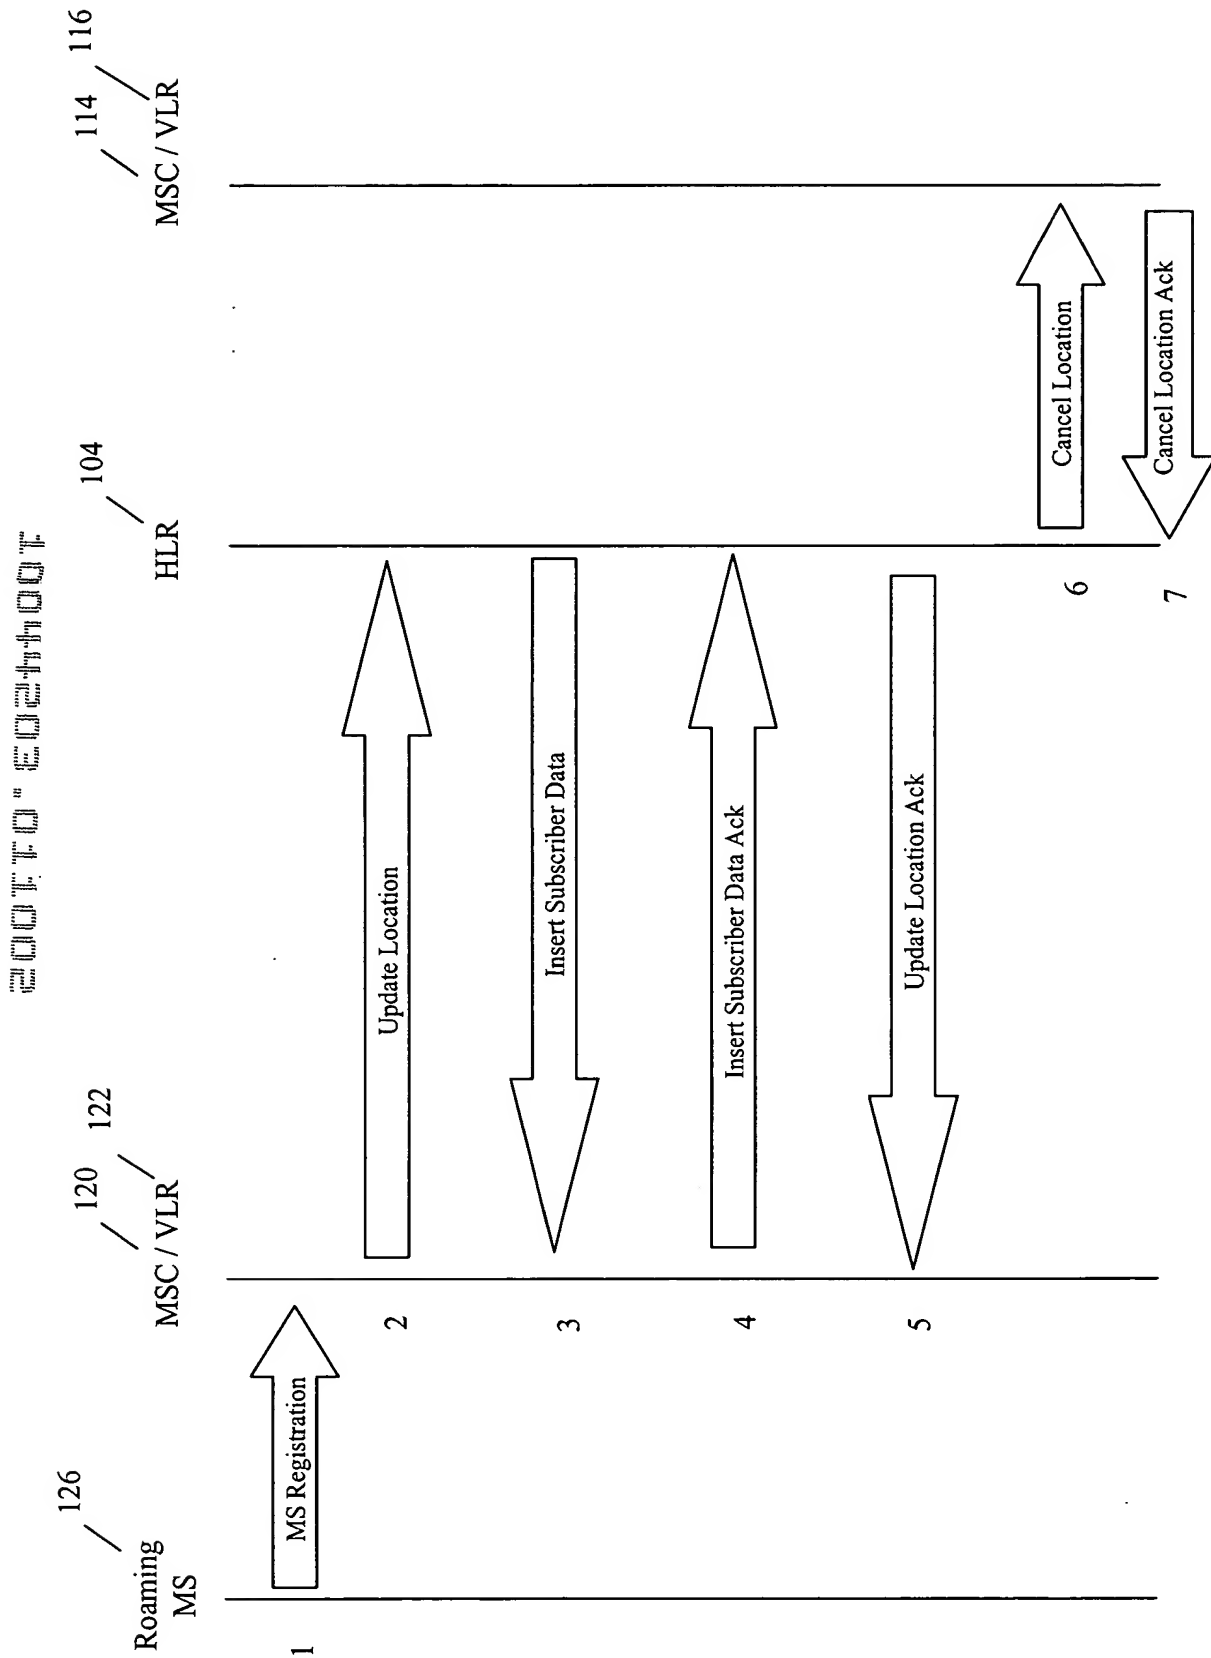


(PRIOR ART)


Figure 2

2007-07-07


252

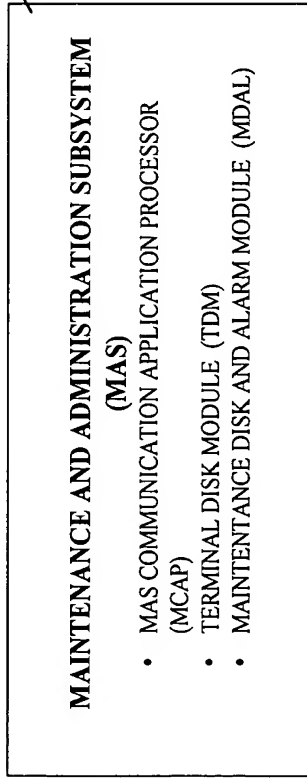

254

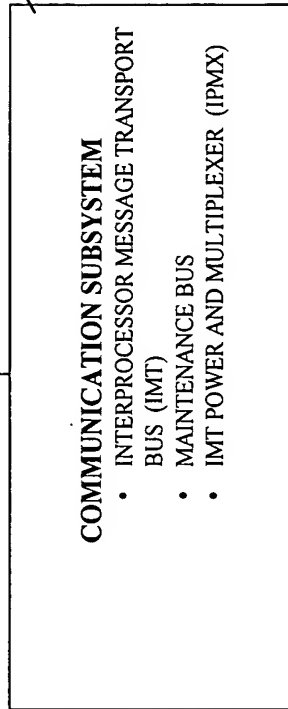

256

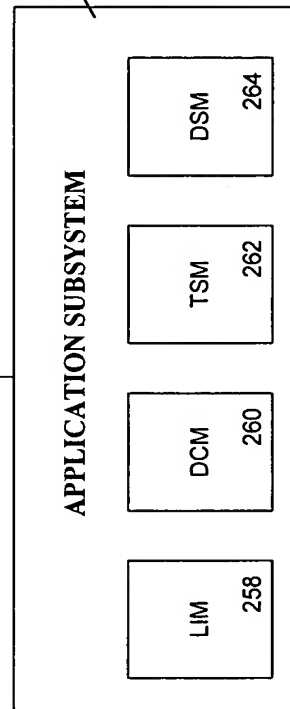

(PRIOR ART)

Figure 3

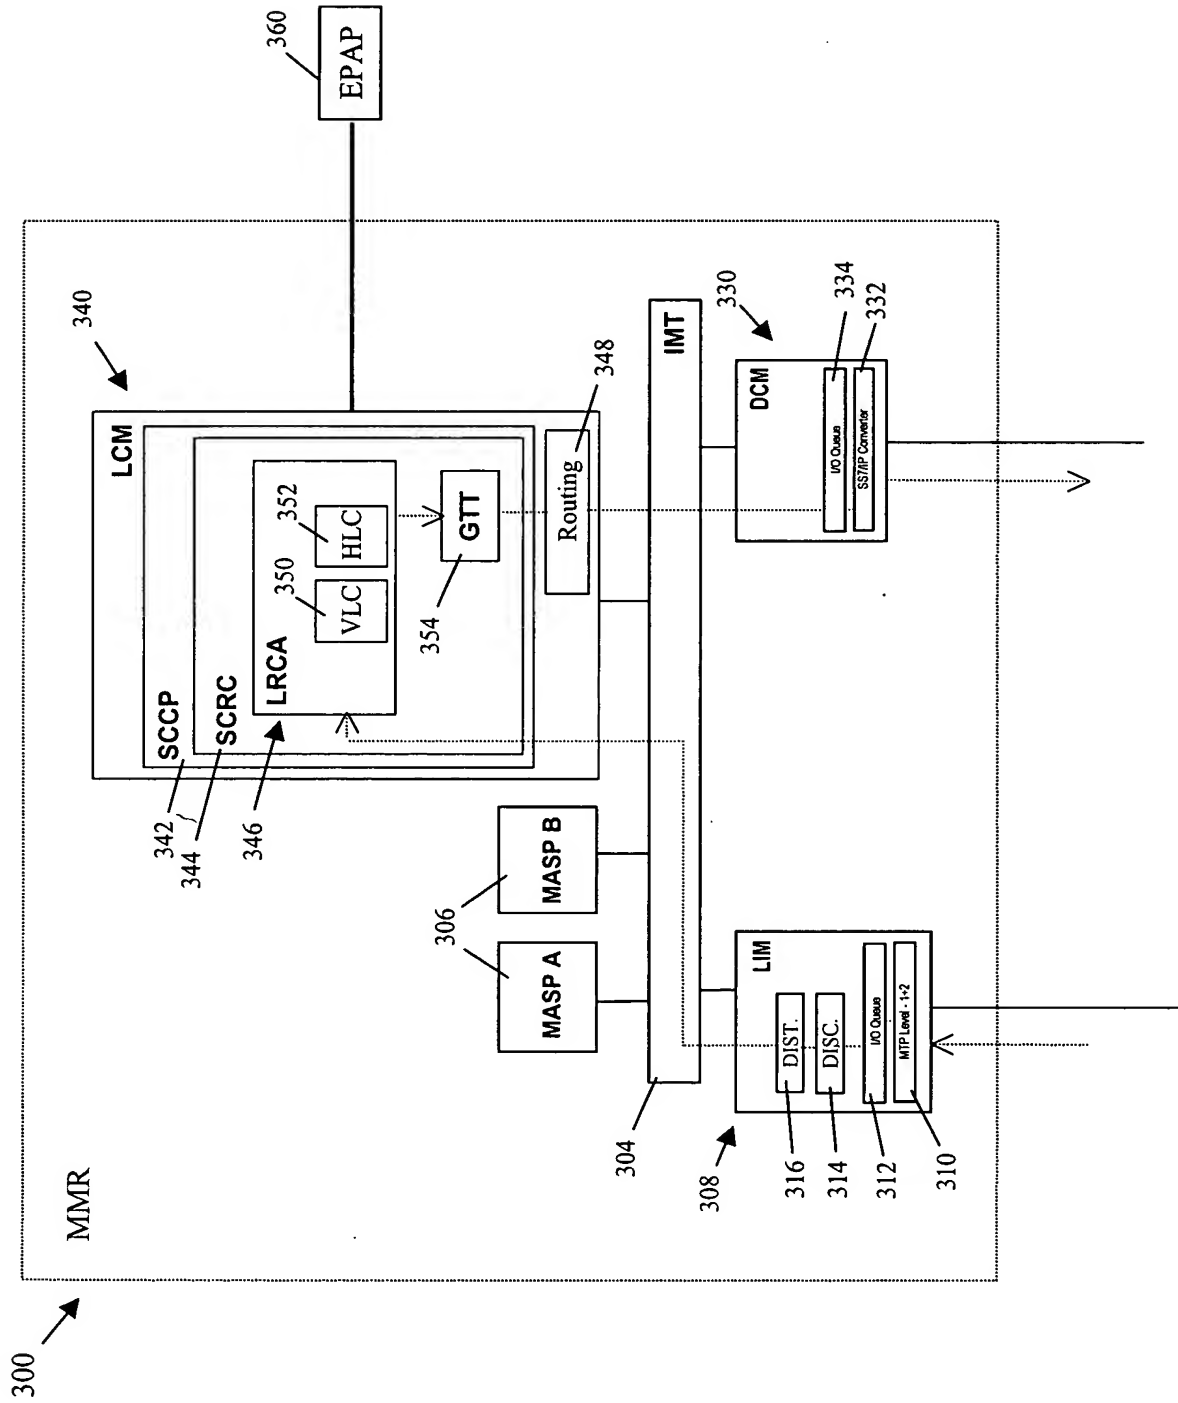


Figure 4

2007-07-24 14:00:00

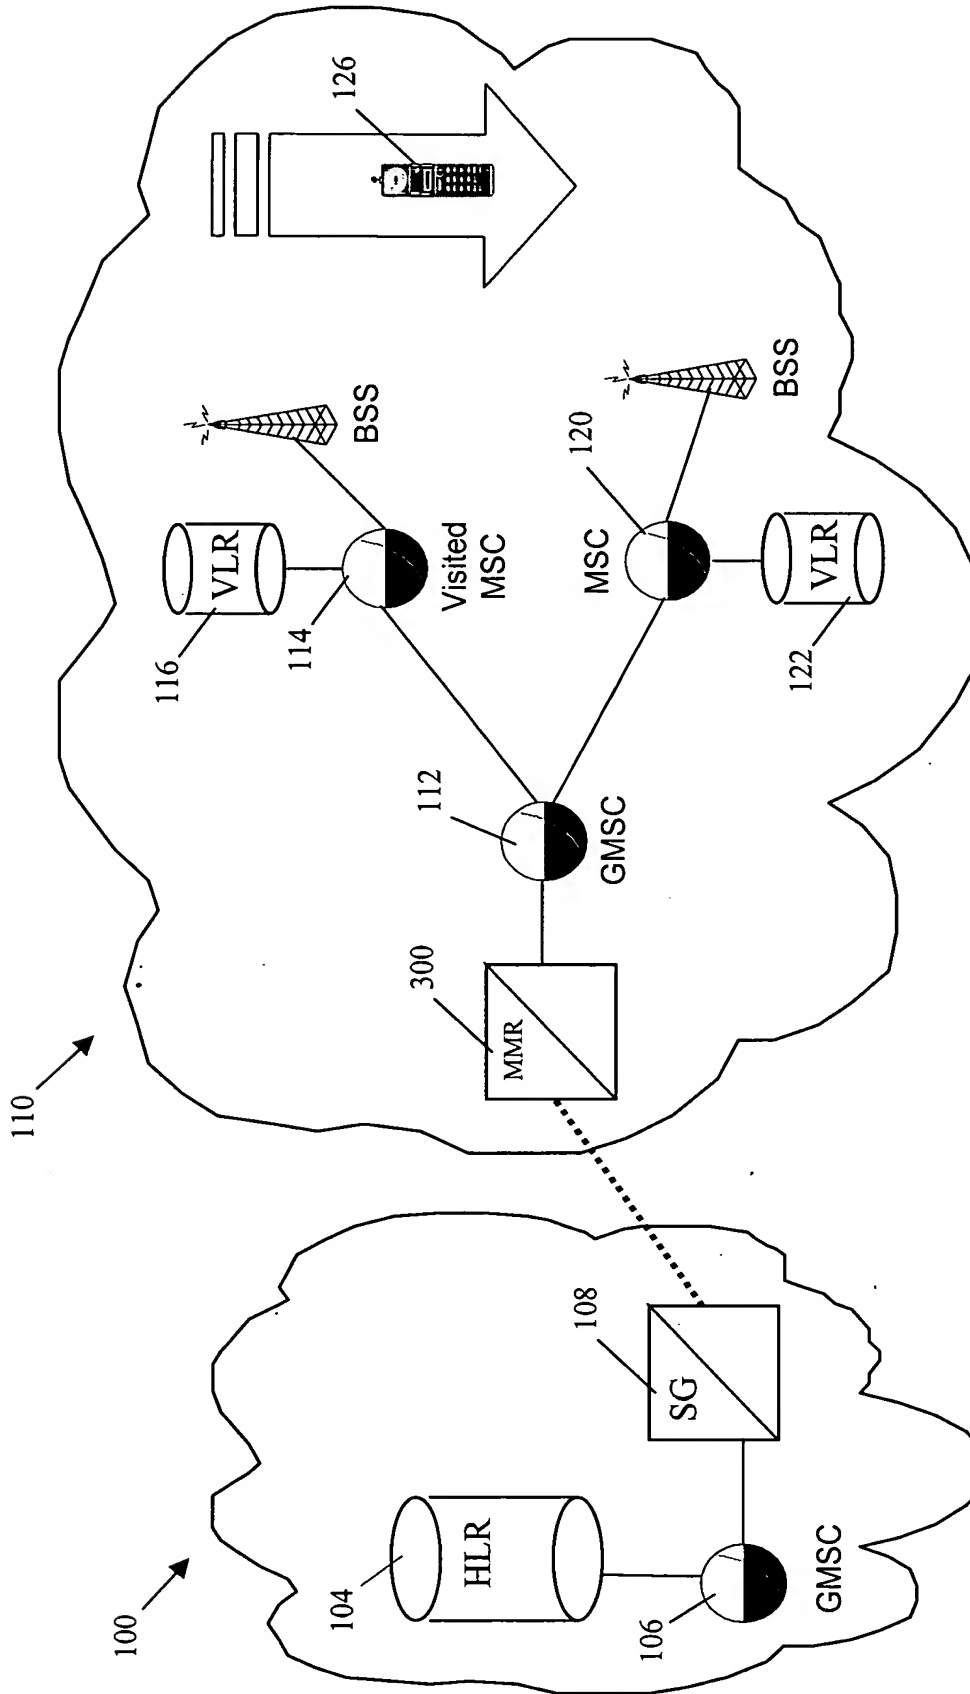


Figure 5

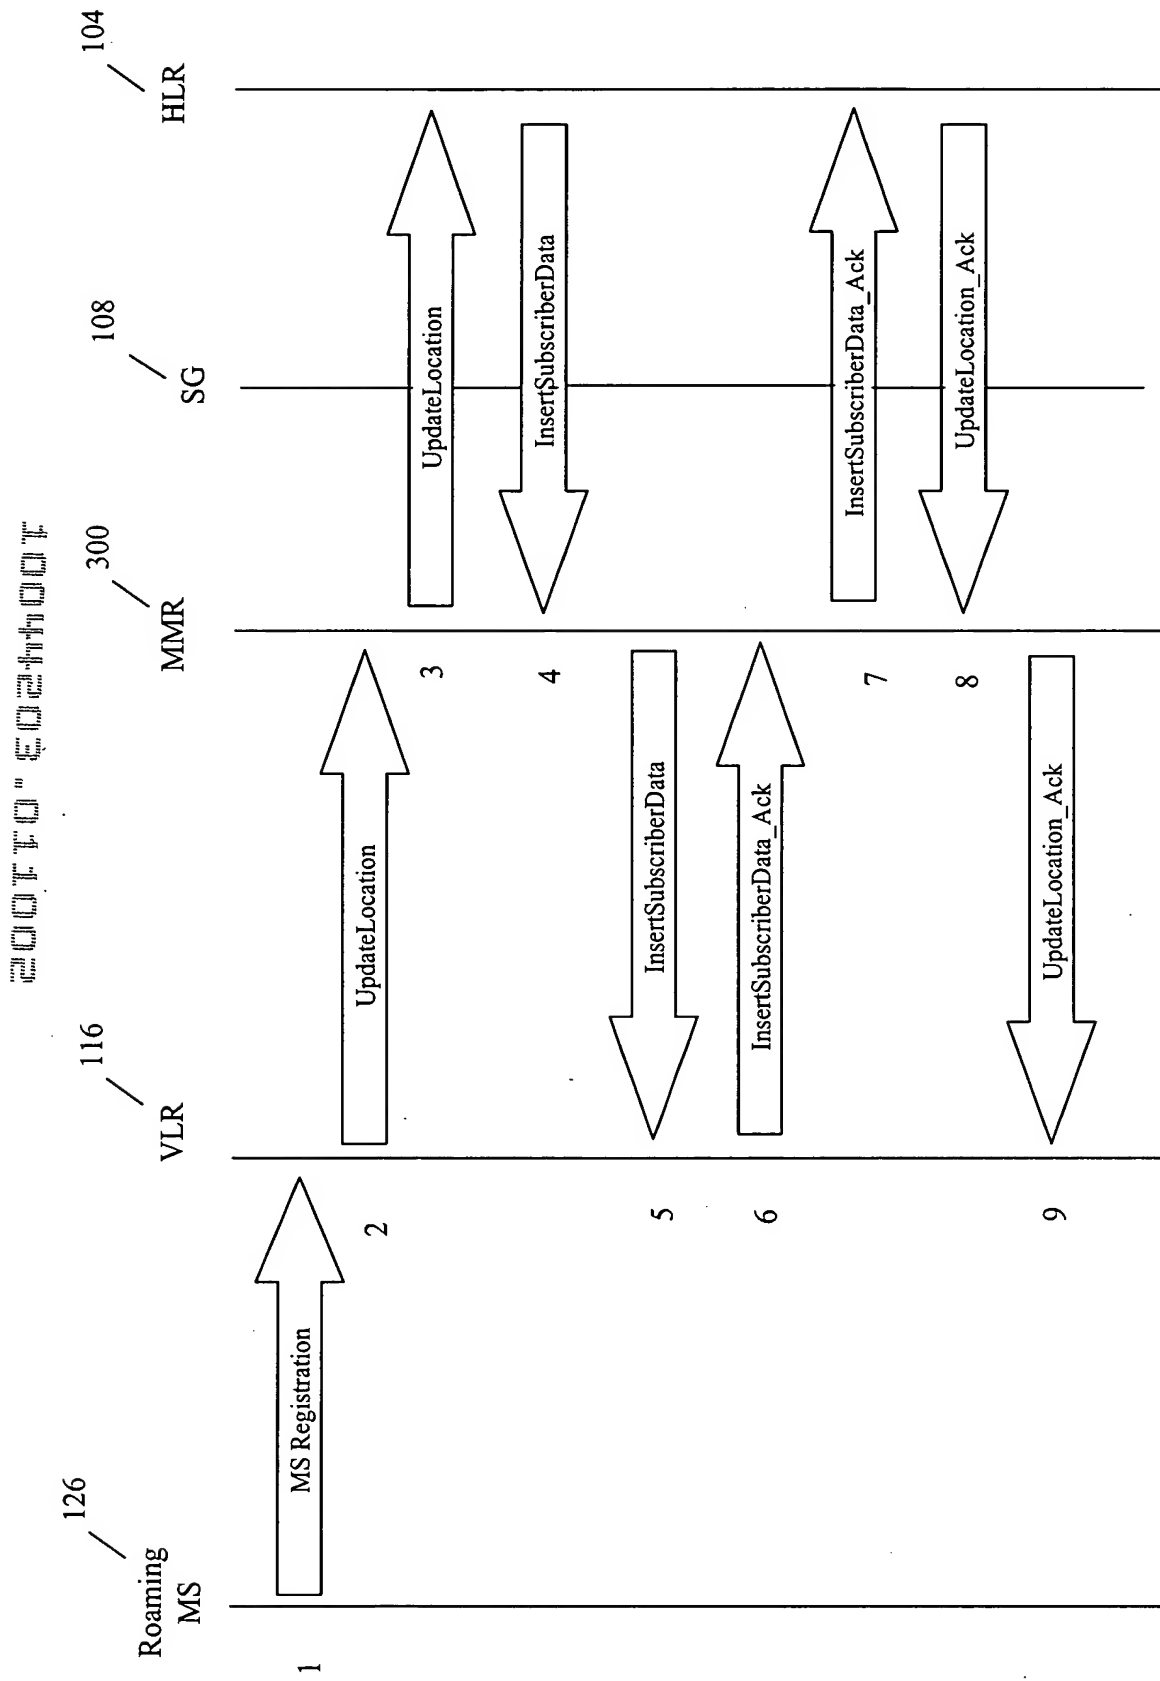


Figure 6

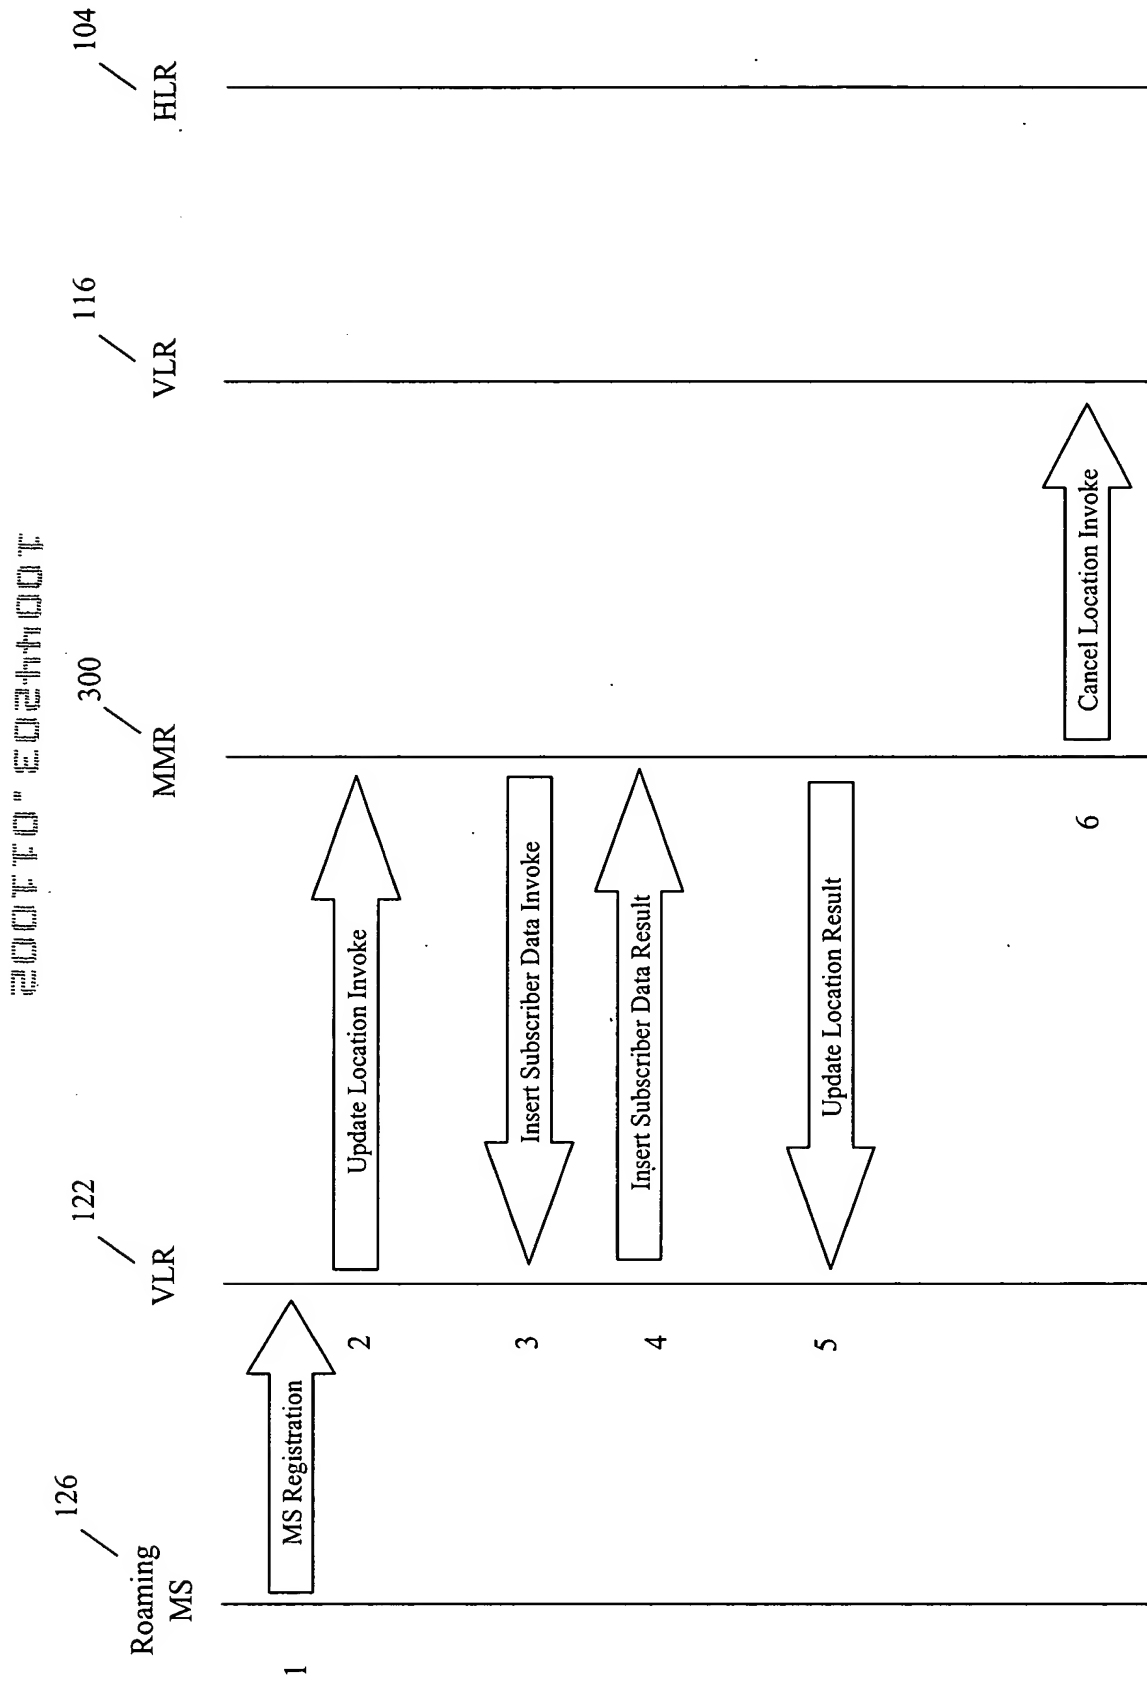


Figure 7

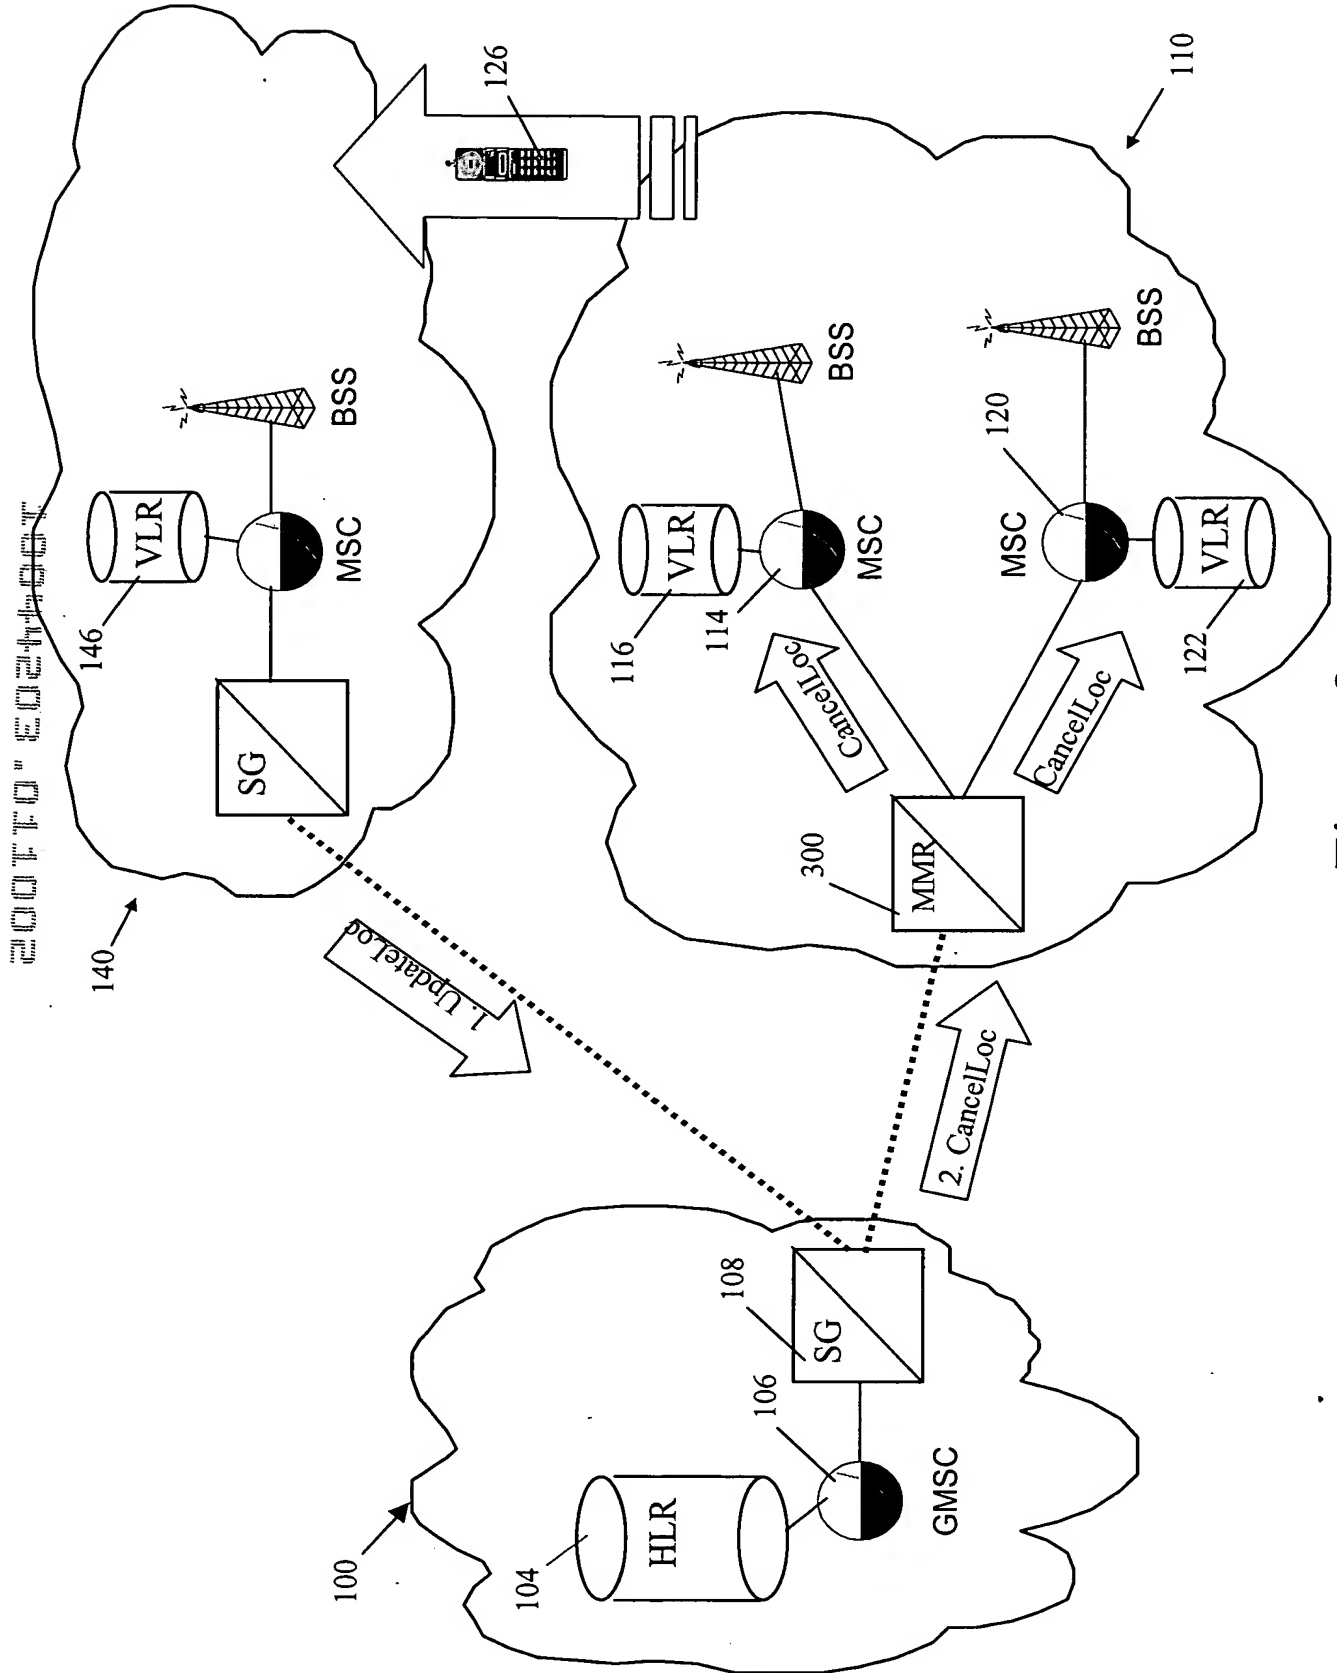


Figure 8



FIG. 9 is a sequence diagram illustrating a method for providing mobile location management services in a network routing node.

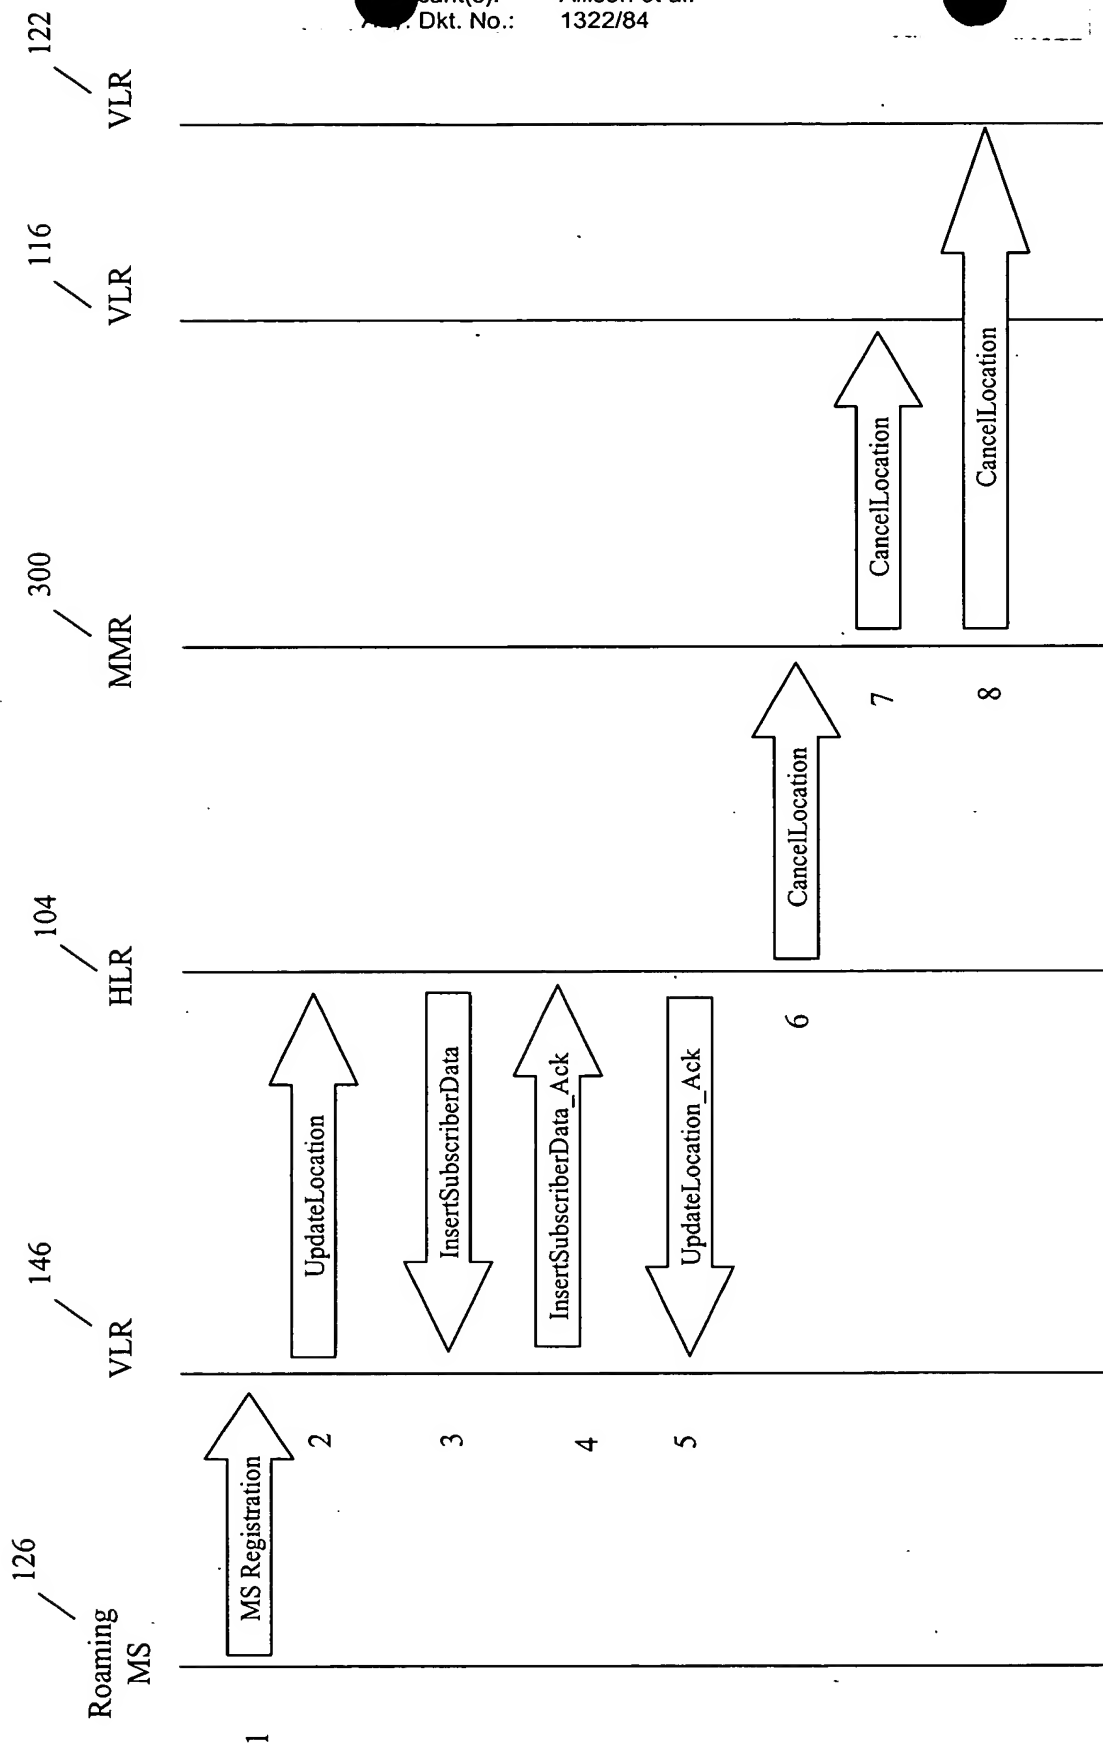


Figure 9

2007-10-24 10:00

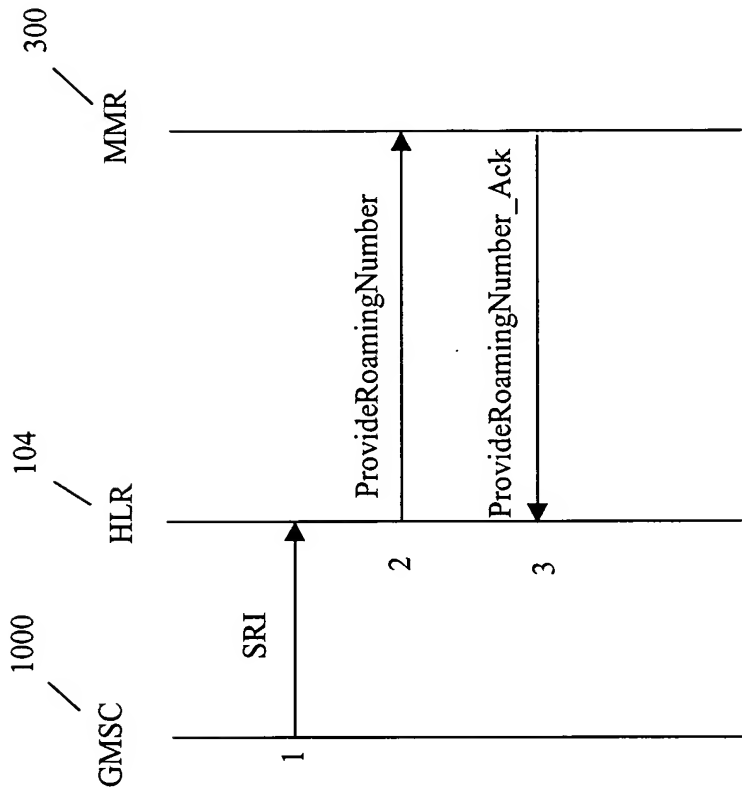


Figure 10